

LUMISERVE




LED PLC LAMPS

www.lumiserve.in

SPECIFICATIONS: LUMISERVE LED PLC LAMP

G24 / B22 Options Available

MODEL NO.	LS-PLC-7W	LS-PLC-9W	LS-PLC-12W
Power	7W	9W	12W
Lumens (Approx)	700 lm	900 lm	1200 lm
Size	L: 139 mm	L: 164 mm	L: 165 mm
Input Voltage	AC 90 – 265 V		
Input Frequency	50 Hz		
LEDs	2835		
Viewing Angle	120 Deg.		
LED Luminous Efficacy	130 – 140 lm/W		
Lamp Efficacy	100 lm/W		
CCT	3000K / 4000K / 6500K		
CRI	> 75		
LED Life	Upto 50000 Burning Hours		
Housing	Aluminium + Polycarbonate Diffuser		
Operating temperature	-20 Deg. to 45 Deg. C		
Features	Upto 50% Energy Saving, Long Life, No UV/IR Radiations, Eco-Friendly (Does not contain Mercury), Durabe (Solid State Lighting)		
Applications	Homes, Offices, Restaurants, Marts, Galleries, Godowns, etc. (for indoor use only)		
Benefits	Simple lamp-for-lamp replacement, re-using the existing fixture without major modifications, using a similar PLC form-factor		

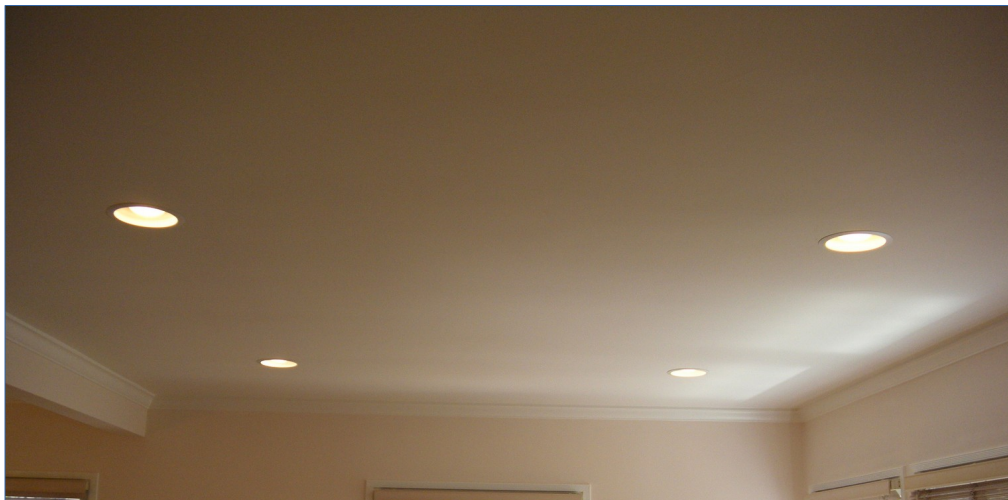

Suggested Application

* Note: Due to constant improvement in technology, the above specifications may be subject to change without prior notice.