



ULTIMA+ OP



OFFICE - Swedbank Customer Service Center (LT)
ULTIMA+ OP Tegular


ULTIMA+ OP not only offers a finely textured and durable surface with a brighter “blue-white” colour for high light reflectance, but is also C2C Bronze certified and provides Class A sound absorption, making it ideal for open plan areas.

Key features

- Excellent sound absorption: 1.00 α_w
- Very high light reflectance: 87%
- Better finish and more durable edges
- C2C Bronze certified / ISO 5 / A+
- 30 year system guarantee

Application areas

Ideal for open spaces (call centres, cafeterias...).

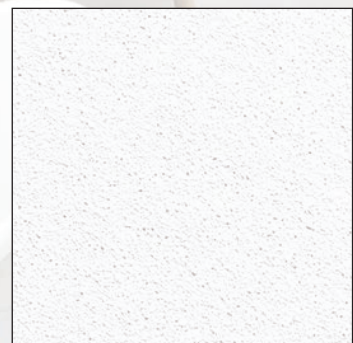

EDGE DETAIL	BOARD	TEGULAR	MICROLOOK 90
THICKNESS (mm)	20	20	20
MODULES (mm)	600 x 600 7682M 675 x 675 7683M 1200 x 600 7684M	600 x 600 7678M 675 x 675 7679M 1200 x 600 7680M	600 x 550 7714M 600 x 600 7685M 675 x 675 7686M 1200 x 600 7687M 1500 x 600 7708M
SUSPENSION SYSTEMS	Prelude 24 XL ² / TLS Prelude 24 Sixty ² XL ² / TLS	Prelude 24 XL ² / TLS Prelude 24 Sixty ² XL ² / TLS	Prelude 15 TL / XL ² Interlude HRC XL ² Silhouette 6mm XL ²

COLOURS



Global White

SUSTAINABILITY



17-20¹




A+



E1

¹ Depends on thickness, edge detail and size of tile.

ACOUSTICS



EN ISO 10848-2 & EN ISO 717-1
 EN ISO 140-3 & EN ISO 717-1
 EN ISO 354 & EN ISO 11654

Hz α_p

	D _{nfw}	R _w	α_w	Class	NRC	125	250	500	1000	2000	4000
Board, Tegular, MicroLook 90	25 dB	10 dB	1.00	A	0.95	0.40	0.80	1.00	0.95	1.00	1.00

FIRE REACTION



EEA Euroclass A2-s1, d0
 EN 13501-1

RUS KM1 (G1, V1, D1, T1)
 FZ 123

OTHER PERFORMANCES & FEATURES



87%



95% RH



$\lambda = 0.037 \text{ W/m K}$

EN 12667 & ISO 8301



3.2 kg/m²

Kg



ISO 5

ISO 14644-1



30YEAR
 system
 guarantee

BIM
 READY

CUSTOM OPTIONS



Dimensions