



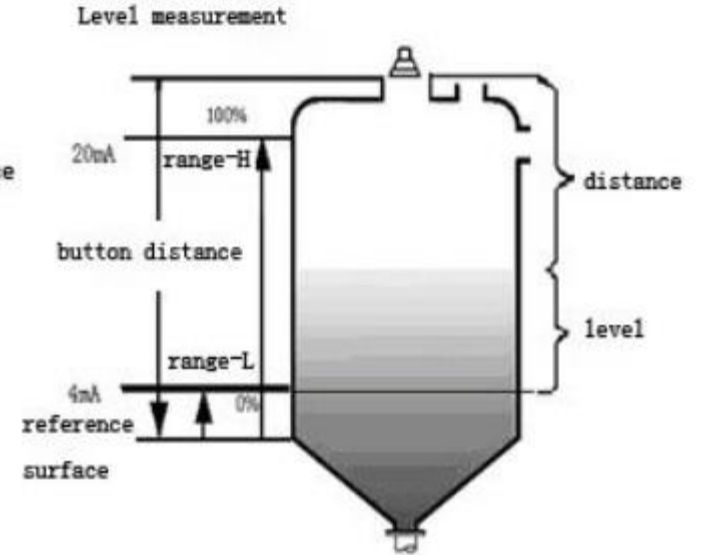

UEM 3000 Series
Integrated & Separate
Indicator Ultrasonic
Level Sensors

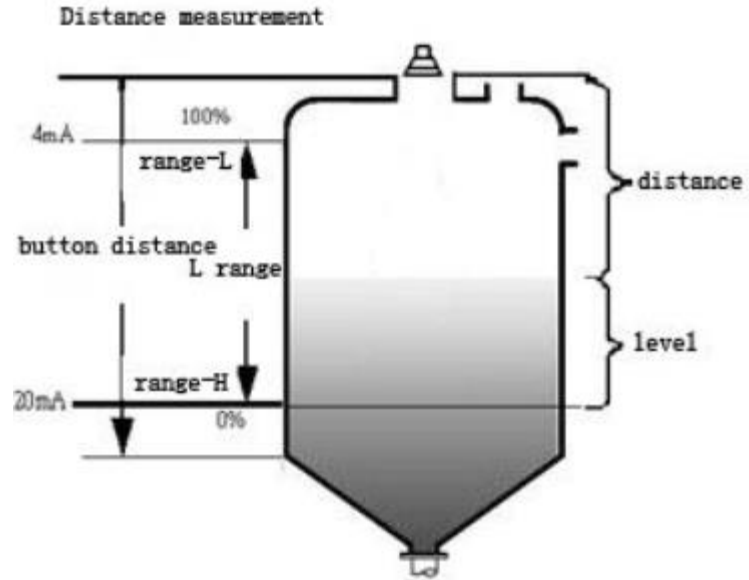

Measurement range	5m、10m、15m、20m、30m、40m、50m、60m	5m、10m、15m、20m、30m、40m、50m、60m、70m、
Measurement accuracy	0.25%-0.5%	0.25%-0.5%
resolution	3mm or 0.1% (take great)	3mm or 0.1% (take great)
display	LCD	LCD
Analog output	4wires4~20mA/750Ω load 2wires4~20mA/250Ω load	4~20mA/750Ω load
Relay output	2groups AC 250V/ 8A or DC 30V/ 5A state programmable (optional)	Single channel for two groups, double channels for four groups AC 250V/ 8A or DC 30V/ 5A state programmable (optional)
Power supply	Standard configuration 24VDC optional 220V AC+15% 50Hz	Standard configuration 220V AC+15% 50Hz optional 24VDC 120mA custom 12VDC or power supply
Environment temperature	Display instrument-20~+60℃, transducer-20~+80℃	Display instrument -20~+60℃, transducer-20~+80℃
communication	Optional 485 , 232 communication (Manufacturer agreement)	Optional 485 , 232 communication (Manufacturer agreement)
Protection grade	Display instrument IP65 , transducer IP68	Display instrument IP65, transducer IP68