
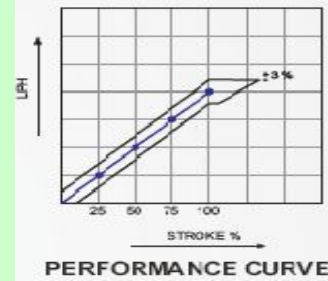


MP-60

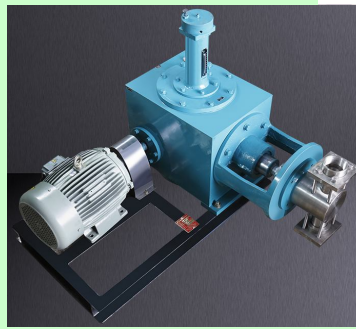

SELECTION CHART


PUMP SPEED - 100 SPM (NOMINAL) GEAR RATIO 15:1 MOTOR 1500 RPM				MODEL	PL. Dia mm	Max. Pr. Kg/cm ²	PUMP SPEED - 185 SPM (NOMINAL) GEAR RATIO 8:1 MOTOR 1500 RPM			
Cap. LPH	Suc. Del. mmNB/BSP	% Of Max. Pr.	Motor k.w				Cap. LPH	Suc. Del. mmNB/BSP	% Of Max. Pr.	Motor k.w
102	15	100	2.2	MP - 60	20	200	204	15	100	2.2
147	25				24	200	293	25		
361	25				32	155	521	25		
407	25				40	100	815	25		
587	25				48	69	1173	40		
742	40		80		3.7	54	55	1485	40	
979	40					62	41	1957	40	
1074	40					66	37	2216	40	
1320	40					72	30	2639	40	
1400	40					74	28	2800	50	
1753	40	50	5.5	84	23	3589	80X50			
2061	40			90	19	4122	80X50			
2545	80X50			100	15	5089	80X80			
3080	80X50			30	110	12	6158	80X80		

MOC CHART

Sr.No.	Description	MOC	Sr.No.	Description	MOC
1	Plunger	SS304,SS316,SS304L, SS316L	1	Plunger Ring	PTFE
2	Liquid Head	SS304, SS316, alloy20	2	Gland Packing	PTFE
3	Through Bush	SS304, SS316, alloy20	3	NRV Balls	SS, PTFE, Glass Ceramic
4	Non Return Valves	SS304, SS316, alloy20 PP, PVC, PTFE			

FEATURES

- Multiple head plunger pumps with common drive for mixing two or more liquid in a desired ratio. The ratio can be easily reset.
- The design & Performance of MM Series Pumps conforms to API675.

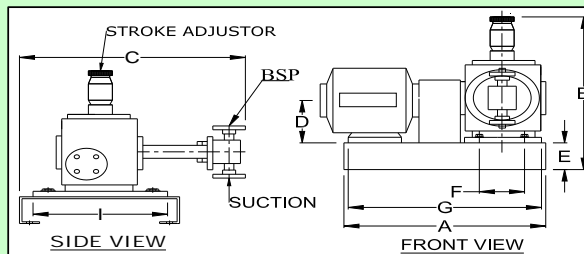

DIMENSIONS IN MM

A	B	C	D	E	F	G	I
800	600	870	210	75	350	640	440

WEIGHT (App) : 250 KG.

PACKING SIZE : 39 x 39 x 27 Inches

MINIMAX PUMPS PVT. LTD.

PLOT NO. 69, SICOF, 328, MIDC, SATPUR, NASHIK - 422007. MAHARASHTRA, INDIA.

Tel. : +91-253-6649383 Cell : + 91-9130022891, 9130022894

E-mail : minimaxpumpspvtltd@gmail.com

Web:www.dosingpumpsindia.co.in / www.minimaxdosing.co.in,



ISO 9001 2008