




[www.biocare.com.cn](http://www.biocare.com.cn)



## Features:

- 7 inches foldable TFT color screen
- Fetal parameters: FHR, TOCO, AFM
- Maternal parameters: MHR, NIBP, SpO<sub>2</sub>
- Providing veracity and reliability of measurement with advanced DSP technology
- Offering independent event prompts via patient's or clinical marker
- Up to 41-hour CTG storage and easy for quick printing or review
- User friendly alarm design: time-over alarm, paper-out alarm and over-limit alarm
- High-resolution and durable thermal printer
- Rechargeable Li-ion battery for about 4 hours of continuous work
- Wire or wireless solution for central monitoring system

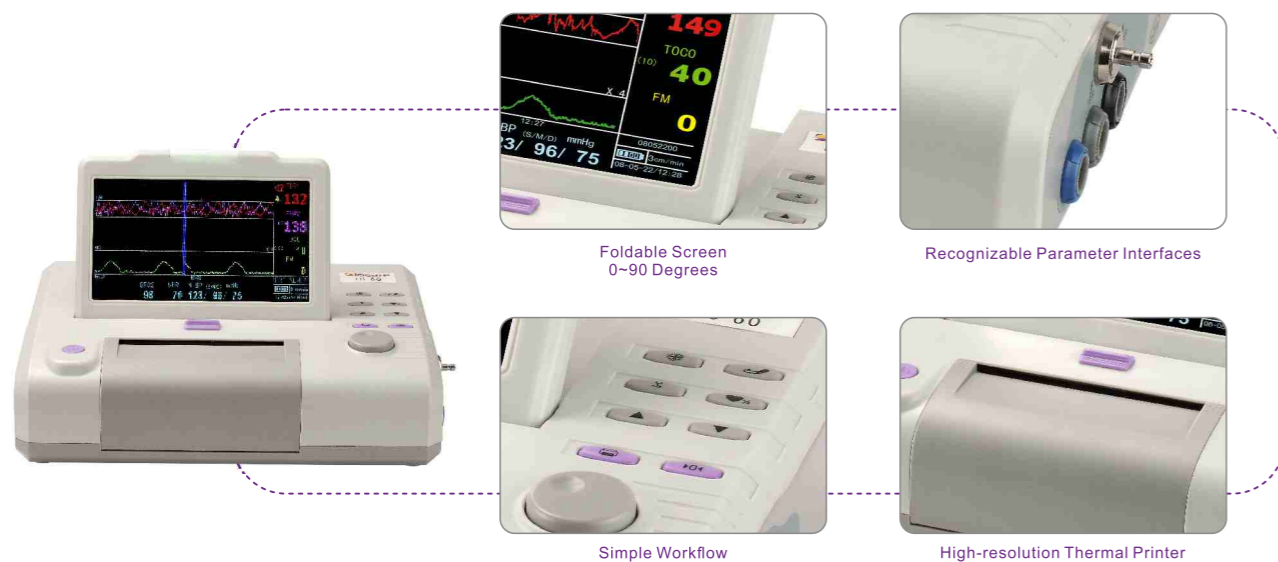

## Specifications

### FHR

Ultrasound frequency: 1.0 MHz  
 Ultrasound strength: < 5mW / cm<sup>2</sup>  
 FHR Range: 50-210 bpm  
 Accuracy: ±2 bpm

### TOCO

TOCO Range: 0-100 units  
 Non-linear tolerance: <±10%

### AFM

Range: 0-100

### Maternal SpO<sub>2</sub>

Measurement Range: 70%-100%  
 Accuracy: ±3%

### Maternal HR

Measurement Range: 30-240 bpm  
 Accuracy: ±2 bpm

### Maternal NIBP

Systolic pressure: 50-240mmHg  
 Mean pressure: 25-200mmHg  
 Diastolic pressure: 15-180mmHg

### Power Supply

AC: 100-240V, 50/60Hz  
 DC: 7.4V, 2200mA rechargeable Li-ion battery  
 continuous working time ≈ 4 hrs

Dimension: 295mm×240mm×73mm(L×W×H)  
 Net Weight: 1.75 kg

## Shenzhen Biocare Bio-Medical Equipment Co., Ltd.

**Headquarters:** 7/F, Block A, Shenzhen Mingyou Industrial Products Exhibition & Procurement Center, Baoyuan Road, Xixiang Sub-district, Bao'an District, 518102 Shenzhen, P.R. China

**Factory:** 2/F West, 4th Block, Dayang Road South, Fuyong Sub-district, Bao'an District, 518103 Shenzhen, P.R. China

**Tel:** +86-755-3661 5333

**Fax:** +86-755-2796 0643

**E-mail:** sales@biocare.com.cn

# iC 60

Fetal / Maternal  
 Monitor

