


CHINA CLAY –

We are a leading organization engaged in offering a wide range of **China Clay** which is available in different forms such as granule, powder and lumps. It is a natural mineral which can be denoted chemically by the hydrated aluminum silicate. We utilize highly reliable and advanced processes in order to formulate this product so as to ensure its wide industrial applications.

Applications of China Clay / Kaolin Powder:

Fiber Glass Filler

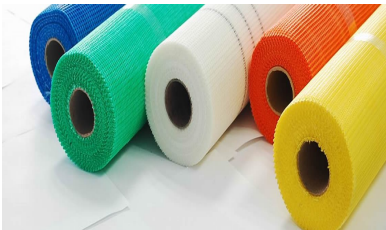

Paint As extruder



Paper as Filler



Welding rods

SHASHI MINERALS

Jodhpur India

c/01/2016



Rubber Industry



Ceramic Industry



Pesticide



SHASHI MINERALS

Jodhpur India

cl/01/2016

Chemical Composition of China Clay :

SiO₂ :	45% to 48%
Al₂O₃	33% to 39%
Fe₂O₃	Below 1.5%
TiO₂	Below 0.5%
CaO	Below 1%
MgO	Below 0.5%
LOI	12% to 14%
Acid Insoluble	97.5%
PH	8.1
B.D.	0.5 to 0.8 gm/cc
Oil Absorption	39.5 ml/100gm
Whiteness	78% to 90%

Grades:

China Clay powder is available from 100 Mesh To 500 Mesh.
China Clay is also available in Lumps / Sizes of 4,6,8,10 Inches

Packing:

Material are available in 25Kg. , 50 Kg. and 1M.T. Jumbo Bags.