


CB 200

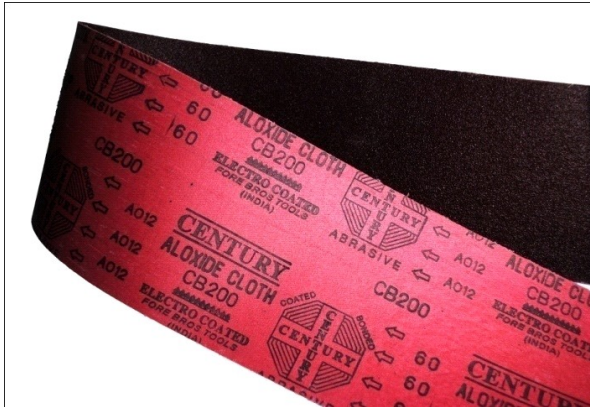

Made with finest quality of treated Aluminium Oxide grains coated on Polytex Y wt Cloth with strong and flexible bonding of synthetic resin. Available grits: 36, 60 , 80, 100 ,120 ,150, 180, 220, 320, 400, 600. Maximum Jumbo roll width 1410mm. Backing colour red.

Can be converted into belt, roll, Cloth Disc, Sheet.

Application: Heavy duty grinding and finishing of high tensile material of ferrous & non-ferrous.

CO 240

Coating on Polytex Super Y-Wt Cloth with specially coated Aluminium Oxide grains with tough bonding for heavy stock removal and high intensity cutting. Mainly used in superior straight/flat grinding job, also can be used in automatic belt grinders, where belts are subjected to high pressure grinding. Grits available 36, 60, 80, 120. Maximum Jumbo roll width 1410mm. Backing colour red.

CO 250

Coating on Polytex Y/X-Wt Cloth with treated Aluminium Oxide grains with flexible bonding for flat grinding as well as contour grinding of ferrous & non-ferrous. This material can be used for moderate pressure grinding. Grits available 60, 80, 120, 150, 180, 220, 320, 400, 600

Can be converted into belt, roll, Cloth Disc, Sheet. Maximum Jumbo roll width

1410mm. Backing colour red.

CL 530



Made with Aluminium Oxide grains coated on X wt Light Drill Cloth with flexible bonding of synthetic resin. Grits available 24, 36, 50, 60, 80, 100, 120, 150, 180, 220, 320, 400, 600. Can be converted into belt, roll, Cloth Disc, Sheet, PSA Disc. Maximum Jumbo roll width 1410mm. Backing colour red.

Application: Grinding of wood, glass, rubber, melmoware, leather, soft ferrous material.

CL 433

Made with Aluminium Oxide grains coated on toughened X wt Light Drill Cloth with flexible bonding of synthetic resin. Grits available 24, 36, 50, 60, 80, 100, 120, 150, 180, 220, 320, 400, 600. Can be converted into belt, roll, Cloth Disc, Sheet, PSA Disc. . Maximum Jumbo roll width 1410mm. Backing colour green.

Application: Grinding of hard wood, glass, rubber, melmoware, leather, soft ferrous material

CL 433 N



Made with Aluminium Oxide grains coated on flexible X wt Light Drill Cloth with flexible bonding of synthetic resin. Grits available 24, 36, 50, 60, 80, 100, 120, 150, 180, 220, 320, 400, 600. Can be converted into belt, roll, Cloth Disc, Sheet. Maximum Jumbo roll width 1410mm. Backing colour green.


Application: Grinding of wood, glass, rubber, melmoware, leather, soft ferrous material.

CP444

Made with soft Aluminium Oxide grains coated on flexible X wt Light Drill Cloth with flexible bonding of synthetic resin. Grits available 60. Can be converted into belt, roll, Cloth Disc, Sheet. Maximum Jumbo roll width 1410mm. Backing colour green.

Application: Grinding of Plywood Board.

CJ285

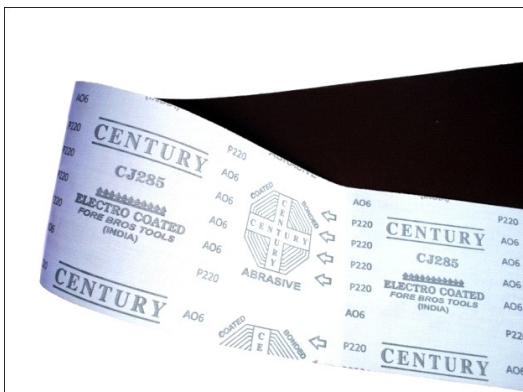

Made with soft Aluminium Oxide grains coated on highly flexible J wt

Polycotton Cloth with flexible bonding of synthetic resin. Grits available 60-400. Can be converted into belt, roll. Maximum Jumbo roll width 1410mm. Backing colour white.

Application: For the polishing of highly curved metal, wood, plastic surfaces. Specially recommended for sanitary fittings made of brass/ stainless steel material.

CJ290



Made with soft Aluminium Oxide grains coated on highly flexible J wt Cotton Cloth with flexible bonding of synthetic resin. Grits available 60-400. Can be converted into belt, roll. Maximum Jumbo roll width 1410mm. Backing colour white.

Application: For the polishing curved surfaces of wood, plastic surfaces. Polishing by hand or some kind of belts.

CD 212



Made with Aluminium Oxide grains coated on Polytex X wt Cloth with flexible bonding of synthetic resin. Grits available 60, 80, 100, 120, 150, 180, 220, 320, 400, 600. Can be converted into Flap Wheel, Mop Wheel, Sector Wheel, Cup Wheel, Flap Disc. Not suitable for belts.

For all kind of surface grinding of ferrous & non ferrous flat and curved material.

CX 218

Made with Aluminium Oxide grains coated on X-wt cotton cloth with flexible bonding of synthetic resin. Grits available 60, 80, 100, 120, 150, 180, 220, 320, 400, 600, 800, 1000. Can be converted into Flap Wheel, Mop Wheel, Sector Wheel, Cup Wheel, Flap Disc. Not suitable for belts.

For all kind of surface grinding of ferrous & non ferrous flat and curved material.

CN 210

Made with finest quality of Silicon Carbide grains coated on Polytex Y wt Cloth with strong and flexible bonding of synthetic resin. Available grits: 36, 60, 80, 100, 120. Maximum Jumbo roll width 1410mm. Backing colour red.

Can be converted into belt, roll,

Application: Heavy duty grinding and finishing of high tensile Stainless Steel and Toughened Glass.

OZ 640

Coating on Polytex Super Y-Wt Cloth with Zirconium Oxide grains with tough bonding for heavy stock removal with fast & suitable cutting action. Most suitable for Aluminium die casting job. Grits available 36, 60, 80, 120. Maximum Jumbo roll width 1410mm. Backing colour red.

Can be converted into belt, roll, Cloth Disc

BZ 460

Coating on Polytex Super Y-Wt Cloth with Zirconium Oxide grains with tough bonding for stock removal with fast & suitable cutting action. Most suitable for Aluminium die casting job. Grits available 36, 60, 80, 120. Maximum Jumbo roll width 1410mm. Backing colour red.

Can be converted into belt, roll, Cloth Disc